


pavimento resistente a las heladas (con espaciadores **FK-5-UFO**)  
 capa de grava triturada min. 3,0 cm  
**DIADEM® DiaDrain-25H-DP** lámina drenante rellena  
**DIADEM® VLU-300** filetro de protección  
 membrana impermeabilizante resistente a las raíces  
 aislamiento térmico  
**DIADEM® FLW-400** capa control de vapor  
 capas adicionales



0 10 50 cm

The present drawing illustrates a possible detail version that is protected by copyright and its use is permitted only with the indication of the source. The structures should always be correctly dimensioned and conformed to the relevant specifications and regulations (structural, energetic, acoustic..etc.)

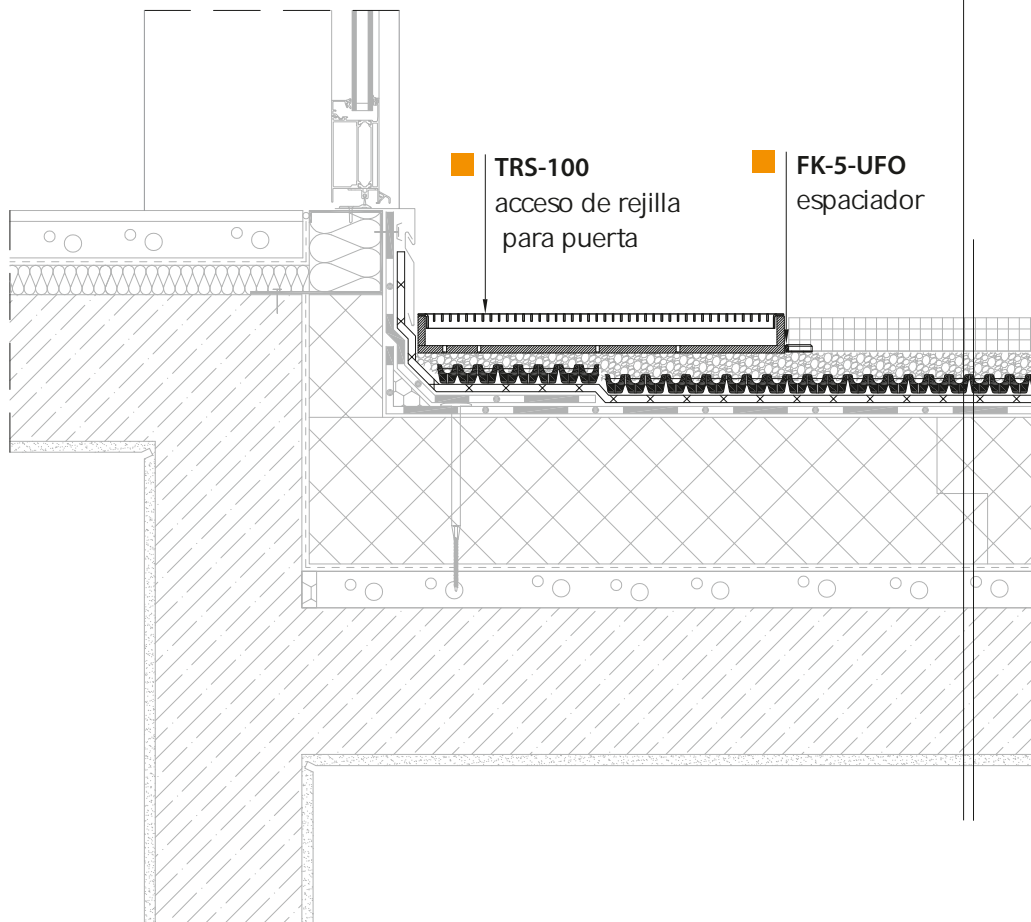

**APP Kft.**  
 Fehérvári út 75.  
 H-9028 Győr  
 tel.: +36 96 / 512 910  
 fax.: +36 96 / 512 914  
 e-mail: info@diadem.com  
 web: www.diadem.com

## DIADEM® 350

terrace pavimentada, cubierta convencional  
**ENCUENTRO PUERTA DE TERRAZA**

DIADEM® producto: TRS, FK-5-UFO

fecha: 2018

sección número:  
 350\_07